



PRODIGY 7.20s 133A

H2 W3 A

pile driven into soil

PRODUCT DATA SHEET


K770090C

Performance class	H2 W3 VI6 A
Working width W_N	W3 (1.0 m)
Vehicle intrusion VI_N	VI6 (1.8 m)
Dynamic deflection	0.7 m
Tested system length	44.00 m
EC Certification	yes

Product series	PRODIGY s
Post spacing	1.33 m
Type of beam	A
Durability	S235JR; S355JR, galvanised acc. to EN ISO 1461

Element length	4.00 m
System height	0.75 m
System width	0.180 m

Mode of operation	single sided
Mode of installation	pile driven into soil
Installation drawing	K770090

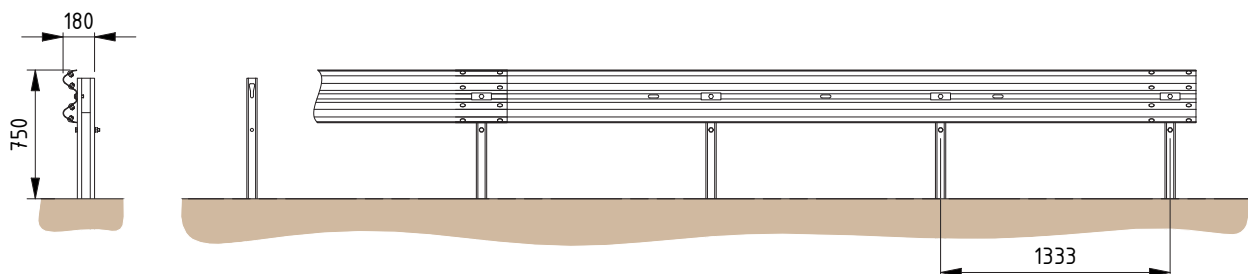

PD770090C-EN PRODUCT DATA SHEET 20240613

MORE INFOS ABOUT THE PRODUCT ON THE DELTABLOC® EXTRANET

Suitable supplementary products, SafeLink transitions etc.

Scan QR code



STEELBLOC® PROTECTS YOU WITH MODULAR ROAD SAFETY

The holistic safety concept for the verge and bridge
developed by DELTABLOC®.



KIRCHDORFER
ROAD & TRAFFIC

DELTABLOC INTERNATIONAL GMBH

Kirchdorfer Platz 2
2752 Wöllersdorf, Austria
office@deltabloc.com
+43 57715 / 470 – 0
deltabloc.com

DELTABLOC®
HOME OF ROAD SAFETY

 **ZINCOMETAL^{SA}**