

PRODIGY 7.21c 200A

H2 W4 A

anchored on concrete

PRODUCT DATA SHEET


K770139A

Performance class	H2 W4 VI5 A
Working width W_N	W4 (1.1 m)
Vehicle intrusion VI_N	VI5 (1.4 m)
Dynamic deflection	1.0 m
Tested system length	44.00 m
EC Certification	yes

Product series	PRODIGY c
Post spacing	2.00 m
Type of beam	A
Durability	S235JR; S355JR, galvanised acc. to EN ISO 1461

Element length	4.00 m
System height	0.75 m
System width	0.285 m

Mode of operation	single sided
Mode of installation	anchored on concrete
Installation drawing	K770139

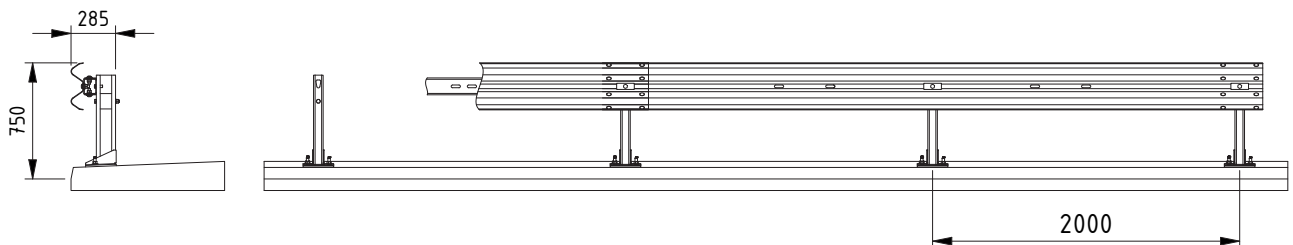

PD770139A-EN PRODUCT DATA SHEET 20240613

MORE INFOS ABOUT THE PRODUCT ON THE DELTABLOC® EXTRANET

Suitable supplementary products, SafeLink transitions etc.

Scan QR code



STEELBLOC® PROTECTS YOU WITH MODULAR ROAD SAFETY

The holistic safety concept for the verge and bridge
developed by DELTABLOC®.



KIRCHDORFER
ROAD & TRAFFIC

DELTABLOC INTERNATIONAL GMBH

Kirchdorfer Platz 2
2752 Wöllersdorf, Austria
office@deltabloc.com
+43 57715 / 470 – 0
deltabloc.com

DELTABLOC®
HOME OF ROAD SAFETY

 **ZINCOMETAL^{SA}**